

INDUSTRIAL PRODUCT DATASHEET

reTerminal E1001

Monochrome ePaper Display

Ultra-low-power 7.5-inch monochrome ePaper display with AI-driven no-code UI, broad software compatibility, and long battery life for versatile HMI applications.

SKU

100073581

UPDATED

2026-07-28 08:55:42

PRICE

\$79.00(Excl. VAT)



Overview



The reTerminal E1001 Monochrome ePaper Display is a fully assembled 7.5-inch 800×480 ePaper panel with ESP32-S3, delivering up to 3 months of battery life from a 2000mAh cell in deep sleep mode (6-hour refresh). It enables no-code dashboard creation via SenseCraft Seeedash and integrates with TRMNL, Home Assistant, ESPHome, Arduino, and PlatformIO for use in desktop assistants, home automation, smart offices, retail, and education.

Key Features

Note:

- The reTerminal E Series Display supports SenseCraft HMI by default firmware. If you need to re-flash the TRMNL Dashboard firmware, you need to purchase a separate TRMNL software license (<https://shop.usetrmnl.com/products/byod>).
- The SenseCraft HMI platform is now in the beta trial stage, and the functions will be continuously improved. At present, there is a limit to the number of AI generation and UI generation.
- If you need a bigger ePaper panel as a digital photo frame, a **13.3" full-color version** is also available.
- SenseCraft HMI has officially been renamed to **SenseCraft Seeedash**. All your existing content remain available as before.

1. Beautiful, Ready-to-Use ePaper Display

The reTerminal E1001 comes fully assembled as an HMI (Human Machine Interface) in a sleek, durable enclosure, featuring an integrated 7.5 Inch 800×480 monochrome ePaper display. Powered by Espressif's ESP32-S3, it delivers stunning visual performance straight out of the box—no extra setup required.

2. Ultra-Low Power with 3-Month Battery Life

Equipped with a built-in 2000mAh battery and engineered for maximum power efficiency, the reTerminal E1001 runs for up to 3 months on a single charge in deep sleep mode (6-hour refresh interval). Place it anywhere—on your desk, mounted on a wall, or in any space—without worrying about frequent recharging.

3. No-Code UI Design & Deployment with SenseCraft Seeedash

Design and deploy personalized dashboards effortlessly with **SenseCraft Seeedash**, our new AI-powered no-code platform. Create your UI through simple drag-and-drop elements, choose from our rich templates, or let AI help you. Connect real-time data from onboard sensors or web APIs, then deploy your finished dashboard to reTerminal E1001/E1002 display with just a few clicks. From design to data configuration to deployment, everything happens seamlessly on one single platform.

4. Works with Popular Software Platforms

Enjoy seamless compatibility with multiple software ecosystems. **Create no-code TRMNL Dashboards with 300+ plugins** for everyday and work data, connect instantly to **Home Assistant via ESPHome** firmware, or developing your customized applications using **Arduino**, PlatformIO or ESP32-IDF environment. You can also access all supported firmware and tools for the reTerminal E Series from **one centralized Firmware Hub**.

5. Flexible Hardware & Software Customization

Leveraging Seeed Studio's extensive OEM/ODM expertise, the reTerminal E1001/E1002 can be customized to fit your exact needs. Whether you require specific sensors, modified I/O configurations, or tailored UI designs, it's built to adapt—ideal for industrial, educational, or personal use.

ESPHome Ready-Made Project: Zero-Code Setup!

Seeed Studio is proud to have joined the ESPHome Ready-Made Project. No YAML or coding required—flash your firmware directly via web browser for instant integration.


Featured Devices:


- [XIAO Smart IR Mate](#): Your ultimate Home Assistant infrared hub.
- [XIAO W5500 Ethernet Adapter V1.2](#): Reliable PoE Bluetooth Proxy for Seamless Connectivity.

Experience seamless setup now at the [ESPHome Ready-Made Projects website!](#)

[Explore landing page](#) to discover more plug-and-play, Home Assistant-compatible devices designed for faster deployment and simplified integration.

Product Gallery

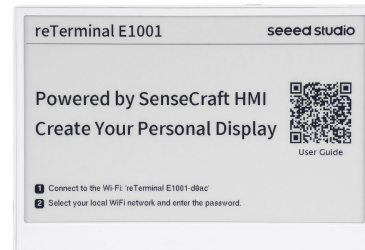

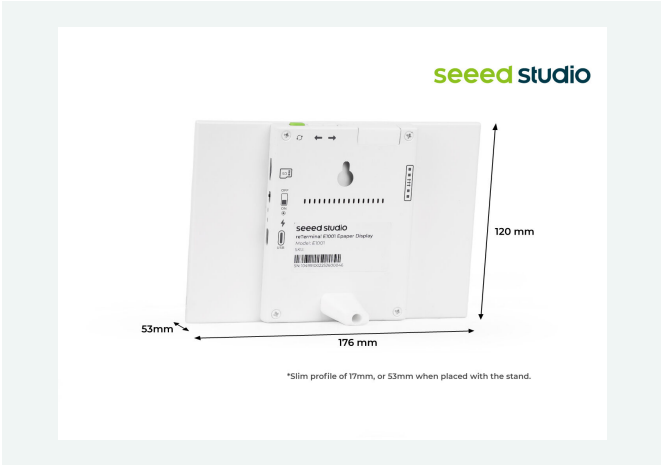

Specification


Product Name	reTerminal E1001	reTerminal E1002
Processor	ESP32-S3 with 8MB PSRAM	
Storage	32MB Flash, support Micro SD card	
Display	7.5" Monochrome	7.3" Full Color
Resolution	800x480 Pixels	
Micro SD Card	Maximum support 32GB SD card, FAT32 format	
Wireless Connectivity	2.4GHz 802.11 b/g/n Wi-Fi, Bluetooth 5.0	
Sensors	Temperature, humidity sensors	
Microphone	Reserved for voice interaction application	
Buzzer	Buzzer for sound alert	
Battery	2000mAh	
Power Input	USB-C 5V/1A	
Software	Default firmware support SenseCraft Seeedash (SenseCraft Seeedash)	
	Support ESPHome firmware for Home Assistant	
	Support Arduino/PlatformIO/ESP-IDF development platform	
Working Temperature	0-40°C	
Dimensions	176mm*120mm*53mm(With Stand)/17mm(Without Stand)	

ePaper Displays in Comparison	reTerminal E1001	reTerminal E1002	XIAO 7.5" ePaper Panel	T R M I N A L 7 . 5 " (O G) D I Y K i t

Display	Size	7.5"	7.3"	7.5"	7.5"
	Color	Monochrome	Full-color	Monochrome	Monochrome
	Resolution	800×480	800×480	800×480	800×480
	Partial Refresh	✓	✗	✓	✓
	Refresh Rate	2-5s	12-15s	2-5s	2-5s
MCU		ESP32-S3	ESP32-S3	ESP32-C3	ESP32-S3
Enclosure		Metal	Metal	3D Printed PLA	✗
SD Card Support		✓	✓	✗	✗
Battery	Capacity	2000mAh	2000mAh	2000mAh	2000mAh
	Monitoring	✓	✓	✗	✓
Expansion Interfaces		UART & I2C	UART & I2C	✗	✗

Compatible Software	SenseCraft Seeedash Home Assistant/ESPHome TRMNL Arduino EEZ Studio	SenseCraft Seeedash Home Assistant/ESPHome TRMNL Arduino Sqaureline Vision EEZ Studio	Home Assistant/ESPHome TRMNL Arduino	T R M N L S e n s e C r a f t S e e d a s h H o m e A s s i s t a n t A r d u i n o
Certifications	FCC/CE/MIC Radio/ROHS	FCC/CE/MIC Radio/ROHS	✗	✗
MSRP	\$69-\$76.99	\$99-\$109.99	\$65.55-\$72.19	\$ 4 2 . 6 6 - \$ 4 6 . 5 4

Hardware Overview

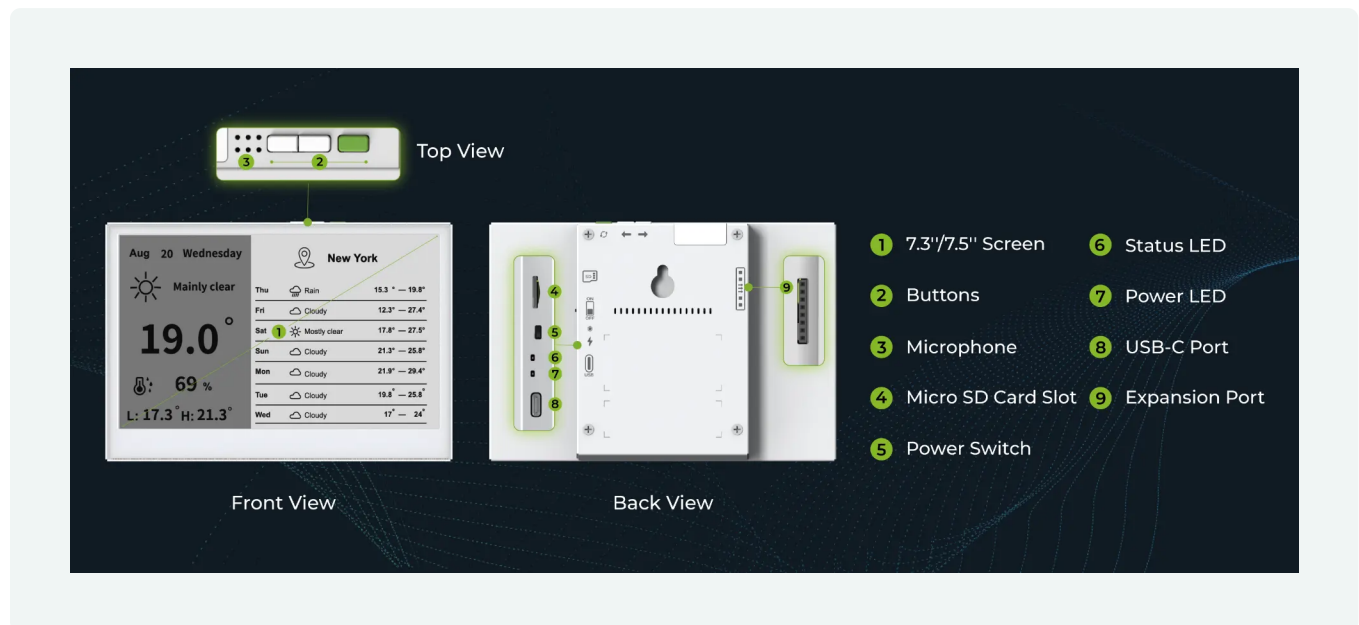

Applications

- **Desktop Personal Assistants:** Track your personal calendars, notifications, weather, or news feed as a stylish, energy-efficient alternative to tablets.
- **Home Automation Dashboards:** Display real-time smart home data like temperature, humidity, and air quality via Home Assistant.
- **Smart Office Displays:** Show meeting room availability, office schedules, or directional guidance in low-power, always-on ePaper displays.
- **Retail & Public Information Displays:** Low-power ePaper signs for menus, schedules, or occupancy indicators with long battery life.
- **Education & Rapid Prototyping:** An ideal platform for developers and students to learn IoT, embedded systems, and no-code UI design, while quickly prototyping and testing sensors, modules, or custom dashboards.

Part List

reTerminal E1001 ePaper Display	X1
USB Type-C cable	X1
Display stand with screw	X1
Screw driver	X1

Compliance & Logistics



HSCODE	8543709990
USHSCODE	8524119000
UPC	
EUHSCODE	8471707000
COO	CHINA

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

15.21

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy.

If not installed and used in accordance with the instructions, it may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Resource Links

- <https://www.seeedstudio.com/reTerminal-E1001-p-6534.html>
- [reTerminal E Series ePaper Display](#)
- [reTerminal MIC Radio Certificate](#)
- [reTerminal E1001 FCC Certificate](#)
- [reTerminal E1001 CE Certificate](#)
- [reTerminal E1001 ROHS](#)

Seeed Technology Co.,Ltd.

9F, Building G3, International E City,
Zhongshanyuan Road, Nanshan, Shenzhen, China

Tel: +86 0755-80695676

Web: www.seeed.cc

Shop: www.seeedstudio.com